

◆ PRC2-63 Catheter Curing Oven Designed specifically for catheter manufacturers



The Despatch PRC2-63 is designed specifically to address the unique requirements of catheter manufacturers. It's a one-size-fits-all solution that features vertical airflow to keep cross wind from blowing tubes around, a tall configuration with a small footprint to save floor space while allowing room to hang catheters up to 80 inches long inside the chamber, and a stainless steel interior for easy cleaning. A truck and dolly system with a rack for hanging catheters is available as an option. Purchasing two trucks allows for preloading one truck while the other is in the oven to improve productivity.

This oven is equipped with the Protocol 3™ microprocessor-based temperature and hi-limit controller with large LCD display and real time clock for auto start capability. The LCD display shows temperature readings along with clear, detailed information on oven status. The data-logging functionality enables reporting and analyzing and data files can be exported via the controller's USB port. Modbus RS485 communications are included for easy data access.



FEATURES AT A GLANCE

- ◆ Maximum temperature of 260°C (500°F)
- ◆ Vertical up airflow
- ◆ Small footprint
- ◆ 84 inch tall chamber to hang catheters
- ◆ 304 stainless steel interior
- ◆ 5-year heater warranty
- ◆ PC interface for remote input, monitoring and recording (RS485 connection)
- ◆ UL and C-UL listed open industrial control panel

OPTIONS

- ◆ Truck and dolly with rack for hanging catheters
- ◆ End of cycle and high-limit indicators
- ◆ Door interlock switch turns off heater and fan when door is opened
- ◆ Audible and visual high-limit alarm
- ◆ 2" and 4" access port for test wires
- ◆ Chart recorders
- ◆ CE compliance



CATHETER CURING OVEN

PRC2-63

PHYSICAL SPECIFICATIONS	
Chamber size (width x depth x height)	36 x 36 x 84.5 in. (91.4 x 91.4 x 214.6 cm)
Capacity in cubic feet (liters)	63 (1,784)
Overall size (width x depth x height)	56 x 62.5 x 123 in. (142.2 x 158.8 x 312.4 cm)
Electrical (standard)	480 Volts, 3-phase, 60 Hertz, 23.7 amps
Electrical (alternative options)	208 Volts, 3-phase, 60 Hertz, 59 amps 240 Volts, 3-phase, 60 Hertz, 47.5 amps
Number of doors	2
FUNCTIONAL SPECIFICATIONS	
Temperature uniformity at set point	+/- 1.5% after stabilization
Operating range with 20°C ambient	40°C to 260°C (105°F to 500°F)
Control stability	+/- 0.5°C
Repeatability	+/- 0.5°C
Exhaust (includes manually adjustable damper)	Gravity exhaust with 5 in. (12.7 cm) diameter exhaust port
Recirculating fan	1 HP; airflow capacity: 1,200 CFM (566 LPS)
Heater capacity	12 kW

Notes:

Notes: Uniformity figures are based on a nine-point test conducted in an empty oven after stabilization period. Uniformity can vary slightly depending on unit and operating conditions.


Minimum operating temperature and cooling times are based on 20°C ambient temperature measured at the fresh air inlet. Specifications are subject to change without notice.

If the existing specifications differ from yours, ask about our customizing capabilities.

Warning: Despatch PRC2-63 Ovens are not to be used with flammable solvents, combustible materials or enclosed containers. If your process involves flammable solvents, consult the factory about modifications.

CATHETER TRUCK AND DOLLY SYSTEM OPTION

A truck and dolly with a rack for hanging catheters is available as an option. Purchasing two trucks allows for preloading one truck while the other is in the oven to improve productivity.

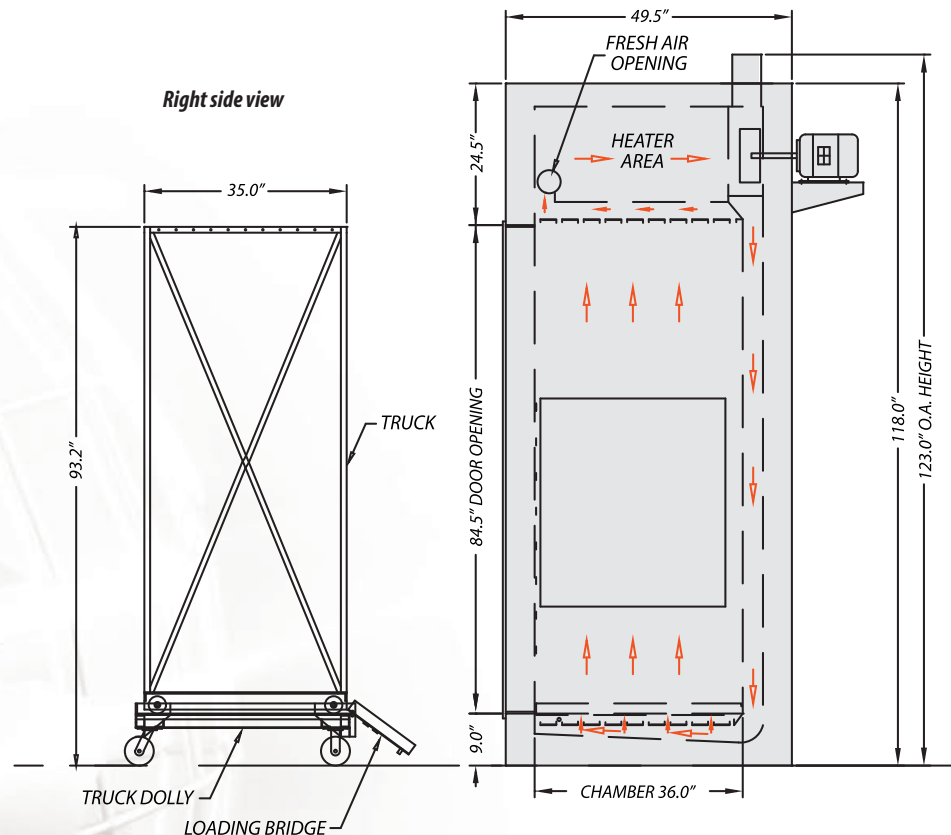

SERVICE AND TECHNICAL SUPPORT

service parts: 1-800-473-7373
international service/main: 1-952-469-8230
service fax: 1-952-469-8193
service@despatch.com
parts@itweave.com

GLOBAL HEADQUARTERS

main phone: 1-800-726-0110
international/main: 1-952-469-5424
sales: 1-800-726-0550
international/sales: 1-952-469-8240
sales@despatch.com

WWW.DESPATCH.COM

8860 207th Street West
Minneapolis, MN 55044 USA

Despatch
Thermal Processing Technology **ITW EAE**